


# Stainless Rivet / Steel Mandrel

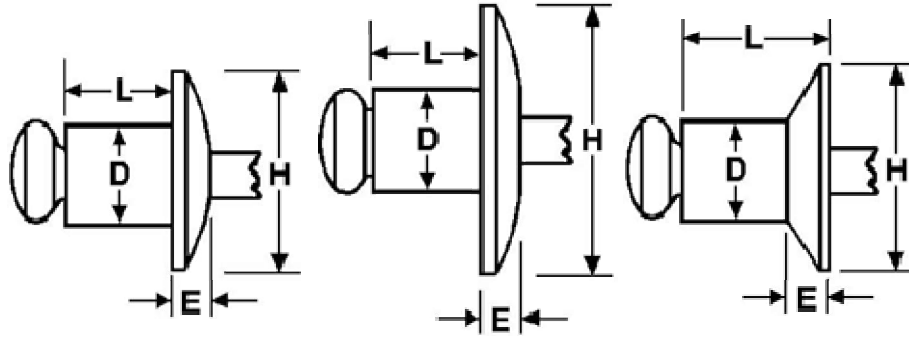


Button Head

Large Flange

Countersunk

## Stainless Rivet - Coated Steel Mandrel - IFI Grade 50

Marson Part No.	D Rivet Dia. Nom.Inch (mm)	Drill No. & Hole Size (mm)	H Head Dia. Nom.Inch (mm)	E Head Height Max.Inch (mm)	L Rivet Length Max. Inch (mm)	 Grip Range Inch (mm)	Typical Ultimate strength(lb.) (newton)	
							Shear	Tensile
<b>1/8" Rivet</b>	.	.	.	.	.	.	.	.
SSB4-1	.	.	.	.	.212 5.4	.032-.062 0.8-1.6	.	.
SSB4-2	.	.	.	.	.275 7.0	.063-.125 1.7-3.2	.	.
SSB4-3	.	.	.	.	.337 8.6	.126-.187 3.3-4.8	.	.
SSB4-4	1/8"(.125) 3.2	#30(.129-.133) 3.3(3.28-3.38)	.250 6.35	.040 1.02	.400 10.2	.188-.250 4.9-6.4	520 2310	600 2660
SSB4-5	.	.	.	.	.462 11.7	.251-.312 6.5-7.9	.	.
SSB4-6	.	.	.	.	.525 13.4	.313-.375 8.0-9.5	.	.
SSB4-8	.	.	.	.	.650 16.5	.376-.500 9.6-12.7	.	.
<b>5/32" Rivet</b>	.	.	.	.	.	.	.	.
SSB5-2	.	.	.	.	.300 7.6	.062-.125 1.6-3.2	.	.
SSB5-3	.	.	.	.	.362 9.2	.126-.187 3.3-4.8	.	.
SSB5-4	5/32"(.156) 4.0	#20(.160-.164) 4.1(4.06-4.16)	.312 7.92	.045 1.14	.425 10.8	.188-.250 4.9-6.4	785 3490	1040 4620
SSB5-6	.	.	.	.	.550 14.0	.251-.375 6.5-9.5	.	.
SSB5-8	.	.	.	.	.675 17.2	.376-.500 9.6-12.7	.	.
SSB5-10	.	.	.	.	.800 20.3	.501-.625 12.8-15.9	.	.
<b>3/16" Rivet</b>	.	.	.	.	.	.	.	.
SSB6-2	.	.	.	.	.325 8.3	.062-.125 1.6-3.2	.	.
SSB6-4	.	.	.	.	.450 11.5	.126-.250 3.3-6.4	.	.



SSC6-4	3/16"(.187) 4.8	#11(.192-.196) 4.9(4.88-4.98)	.350 8.89	.050 1.27	.407 10.3	.126-.250 3.3-6.4	1150 5110	1300 5780
--------	--------------------	----------------------------------	--------------	--------------	-----------	----------------------	--------------	--------------

**KLIK-FAST RIVETS conform to IFI-114 (inch) and IFI-505 (metric)**  
**Millimeters (mm) and Newtons are in blue.**

**The Nutty Company, Inc.**