


Stainless Rivet / Stainless Mandrel

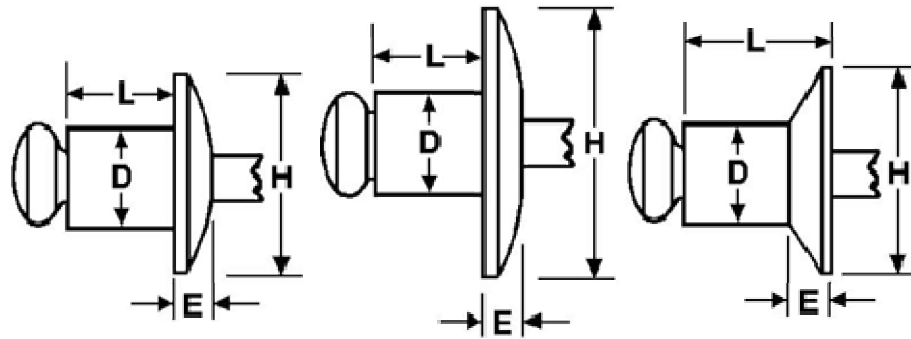


Button Head

Large Flange

Countersunk

Stainless Rivet - Stainless Mandrel - IFI Grade 51

Marson Part No.	D Rivet Dia. Nom.Inch (mm)	Drill No. & Hole Size (mm)	H Head Dia. Nom.Inch (mm)	E Head Height Max.Inch (mm)	L Rivet Length Max.		 Grip Range Inch (mm)	Typical Ultimate strength(lb.) (newton)	
					Inch	(mm)		Shear	Tensile
1/8" Rivet
SSB4-1S212	5.4	.032-.062 0.8-1.6	.	.
SSB4-2S275	7.0	.063-.125 1.7-3.2	.	.
SSB4-3S337	8.6	.126-.187 3.3-4.8	.	.
SSB4-4S	1/8"(.125) 3.2	#30(.129-.133) 3.3(3.28-3.38)	.250 6.35	.040 1.02	.400	10.2	.188-.250 4.9-6.4	520 2310	600 2660
SSB4-5S462	11.7	.251-.312 6.5-7.9	.	.
SSB4-6S525	13.4	.313-.375 8.0-9.5	.	.
SSB4-8S650	16.5	.376-.500 9.6-12.7	.	.
5/32" Rivet
SSB5-2S300	7.6	.062-.125 1.6-3.2	.	.
SSB5-3S362	9.2	.126-.187 3.3-4.8	.	.
SSB5-4S	5/32"(.156) 4.0	#20(.160-.164) 4.1(4.06-4.16)	.312 7.92	.045 1.14	.425	10.8	.188-.250 4.9-6.4	785 3490	1040 4620
SSB5-6S550	14.0	.251-.375 6.5-9.5	.	.
SSB5-8S675	17.2	.376-.500 9.6-12.7	.	.
SSB5-10S800	20.3	.501-.625 12.8-15.9	.	.
3/16" Rivet
SSB6-2S325	8.3	.062-.125 1.6-3.2	.	.
SSB6-4S450	11.5	.126-.250 3.3-6.4	.	.

SSC6-4S	3/16"(.187) 4.8	#11(.192-.196) 4.9(4.88-4.98)	.350 8.89	.050 1.27	.407 10.3	.126-.250 3.3-6.4	1150 5110	1300 5780
---------	--------------------	----------------------------------	--------------	--------------	-----------	----------------------	--------------	--------------

KLIK-FAST RIVETS conform to IFI-114 (inch) and IFI-505 (metric)
Millimeters (mm) and Newtons are in blue.

The Nutty Company, Inc.