
THE NUTTY COMPANY INC
FASTENER SPECIALISTS SINCE 1977

19 Seemans Lane • Milford, CT 06460 USA
203.877.1709 • 1.800.4NUTTY.1 • Fax 203.735.1097
sales@nutty.com • www.nutty.com




PRODUCT DATA SHEET

Bent Pins – Yellow Zinc

1.0 Dimensions Inch series



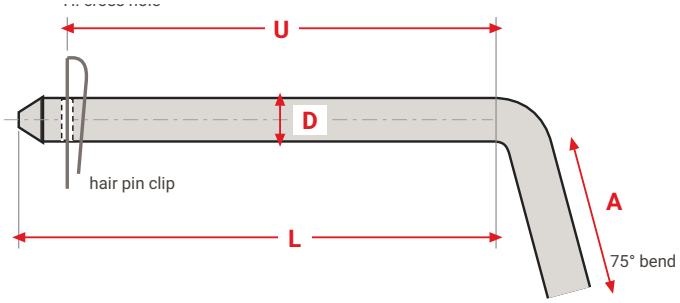

- **Bent pin:** a solid steel pin with a 75° bent leg for grip, a chamfered tip and a cross hole for the included hair pin clip. Used on hitches, trailer and implement connections, gates and equipment linkages.
- **Usable length (U)** is measured from the center of the cross hole to the inside of the bend.

Part No.	D – Pin Diameter		U – Usable Length		L – Pin Length	A – Leg	H – Hole Dia.	Hair Pin Wire
	+.000 / -.010		+.030 / -.000		±.040	Ref.	+.016 / -.000	Dia.
BP383	3/8"	0.375	3"	3.000	3.62	2"	5/32" (.156)	0.098
BP123	1/2"	0.500	3"	3.000	3.62	2"	5/32" (.156)	0.118
BP124	1/2"	0.500	4"	4.000	4.63	2"	5/32" (.156)	0.118
BP125	1/2"	0.500	5"	5.000	5.63	2"	5/32" (.156)	0.118
BP583	5/8"	0.625	3"	3.000	3.62	2"	5/32" (.156)	0.118
BP584	5/8"	0.625	4"	4.000	4.73	2"	5/32" (.156)	0.118
BP585	5/8"	0.625	5"	5.000	5.73	2"	5/32" (.156)	0.118

2.0 Material & Finish

Item	Specification
Material	Low carbon (mild) steel
Finish	Yellow zinc plated
Bend	75° ±2°, inside radius .47; leg end .04 x 45° chamfer
Tip	1/4 x 30° chamfer
Retainer	Hair pin clip included (.098 wire on 3/8 pins, .118 wire on 1/2 & 5/8 pins)
Origin	Imported

Disclaimer: The above is a compilation of data from various industry standards. The Nutty Company, Inc. has made every effort to present the data accurately. However, The Nutty Company, Inc. cannot be held liable for any claim traceable to any errors, typographical or otherwise, contained herein.