


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/28/2026	NUTTY

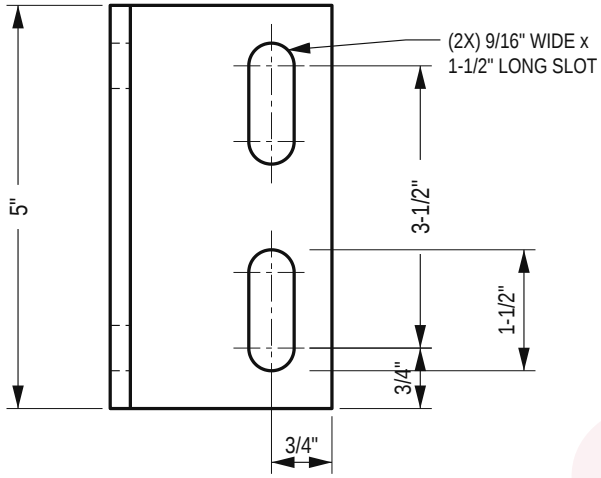


TOP VIEW

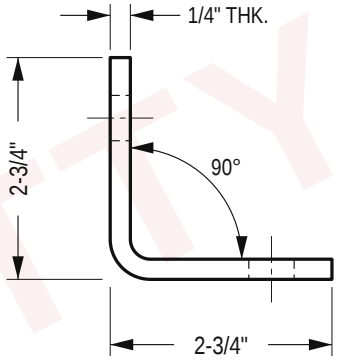

FRONT VIEW

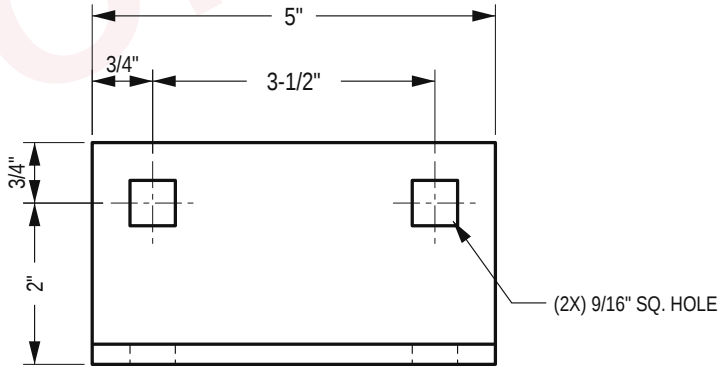

RIGHT SIDE VIEW



SPECIFICATIONS	
MATERIAL	ASTM A36 STEEL, 1/4" THICK
FINISH	HOT-DIP GALVANIZED, ASTM A153
YIELD STRENGTH	36,000 PSI MIN.
TENSILE STRENGTH	58,000 - 80,000 PSI
ELONGATION	20% MIN. IN 8"
LEGS	2-3/4" X 2-3/4" X 1/4" THICK
LENGTH	5"
HOLES	(2) 9/16" SQ. + (2) 9/16" X 1-1/2" SLOTS
FASTENERS	INSTALL USING 1/2" CARRIAGE BOLTS
APPLICATION	DOCK HARDWARE - REINFORCES CLEATS

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. PART MUST BE FREE FROM RUST, DENTS & ANY OTHER SURFACE DEFECTS.
3. REMOVE ALL BURRS & SHARP EDGES.
4. HOT-DIP GALVANIZED AFTER FABRICATION PER ASTM A153.
5. SQUARE HOLES ACCEPT 1/2" CARRIAGE BOLT NECKS; SLOTS ALLOW FIELD ADJUSTMENT.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
FRACTIONAL: ± 1/16"
ANGULAR: ± 1°
BREAK ALL SHARP EDGES

THIRD ANGLE

THE NUTTY INC COMPANY
FASTENER SPECIALISTS SINCE 1977
19 Seemans Lane, Milford, CT 06460
203.877.1709 • sales@nutty.com • nutty.com

TITLE

2-3/4" X 5" CLEAT ANGLE

ASTM A36 STEEL • HOT-DIP GALVANIZED ASTM A153

PART NO.

DHCA

SIZE	SCALE	UNITS	WEIGHT	DRAWN	DATE	SHEET
A	NTS	INCH	28 OZ	NUTTY	10/28/2026	1 OF 1

NUTTY COMPANY