

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/28/2026	NUTTY

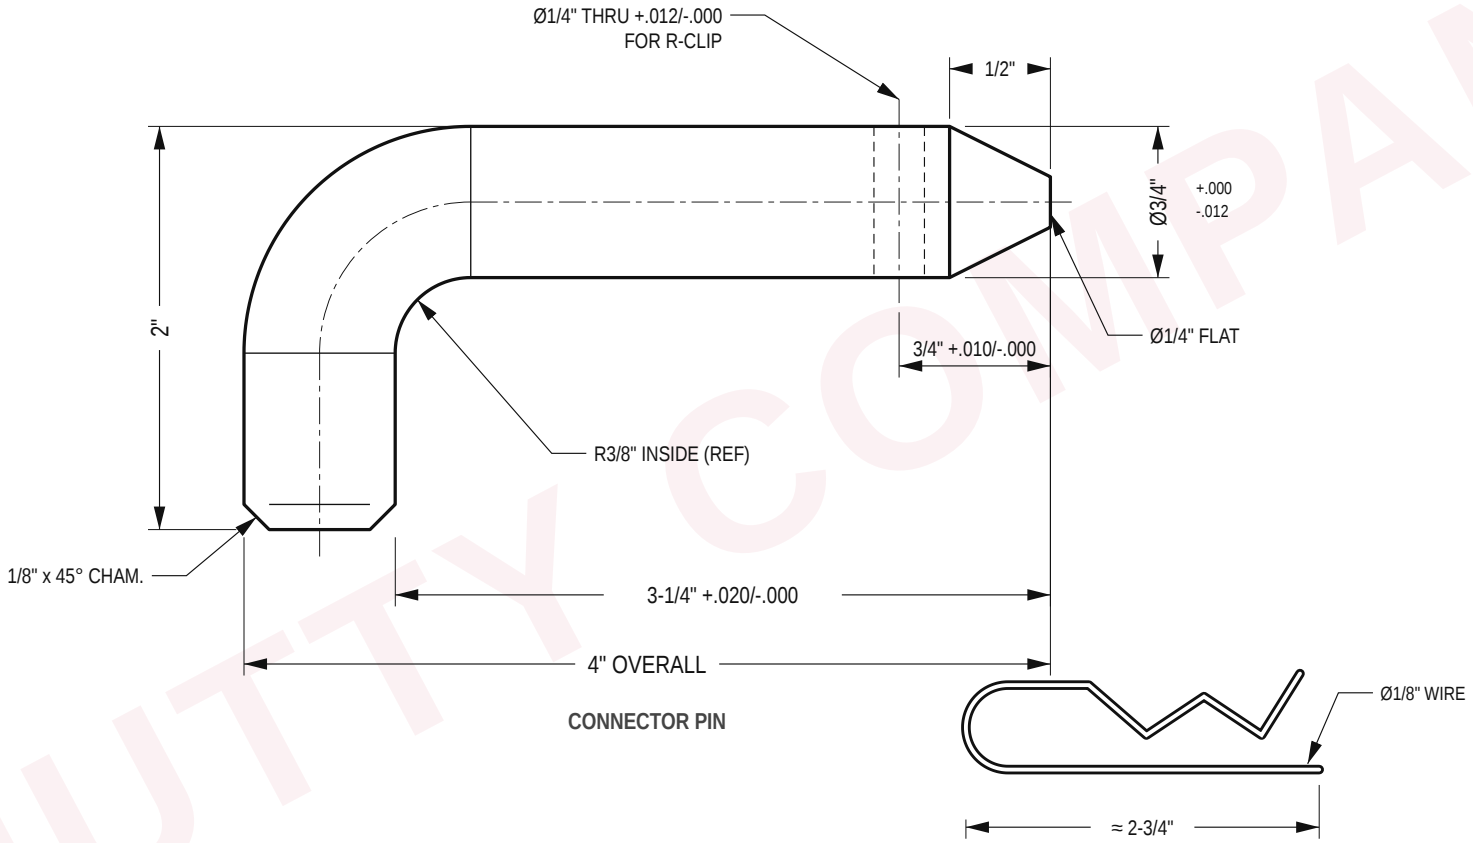

CONNECTOR PIN

R-CLIP (INCLUDED, NTS)



SPECIFICATIONS	
MATERIAL	ASTM A36 STEEL, 3/4" ROUND BAR
FINISH	HOT-DIP GALVANIZED, ASTM A153
YIELD STRENGTH	36,000 PSI MIN.
TENSILE STRENGTH	58,000 - 80,000 PSI
ELONGATION	20% MIN. IN 8"
PIN DIAMETER	3/4"
OVERALL LENGTH	4" (3-1/4" USABLE)
LEG	2"
CROSS HOLE	Ø1/4" THRU, 3/4" FROM TIP
CLIP	R-CLIP, 1/8" WIRE (INCLUDED)
APPLICATION	JOINS MALE & FEMALE HINGE TABS

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. PART MUST BE FREE FROM RUST, DENTS & ANY OTHER SURFACE DEFECTS.
3. REMOVE ALL BURRS & SHARP EDGES.
4. HOT-DIP GALVANIZED PER ASTM A153.
5. ASSEMBLE WITH 1/8" R-CLIP (INCLUDED).

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
FRACTIONAL: ± 1/16" ANGULAR: ± 1°
TOLERANCED DIMS AS SHOWN ON DRAWING
BREAK ALL SHARP EDGES

THIRD ANGLE

THE NUTTY INC COMPANY
FASTENER SPECIALISTS SINCE 1977
19 Seemans Lane, Milford, CT 06460
203.877.1709 • sales@nutty.com • nutty.com

TITLE

HINGE CONNECTOR PIN SET

3/4" PIN • ASTM A36 • HOT-DIP GALVANIZED ASTM A153

PART NO.

DHCP

SIZE	SCALE	UNITS	WEIGHT	DRAWN	DATE	SHEET
A	NTS	INCH	10 OZ	NUTTY	10/28/2026	1 OF 1

NUTTY COMPANY