


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/28/2026	NUTTY

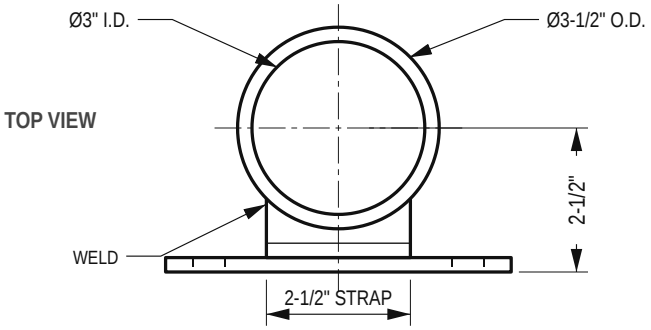


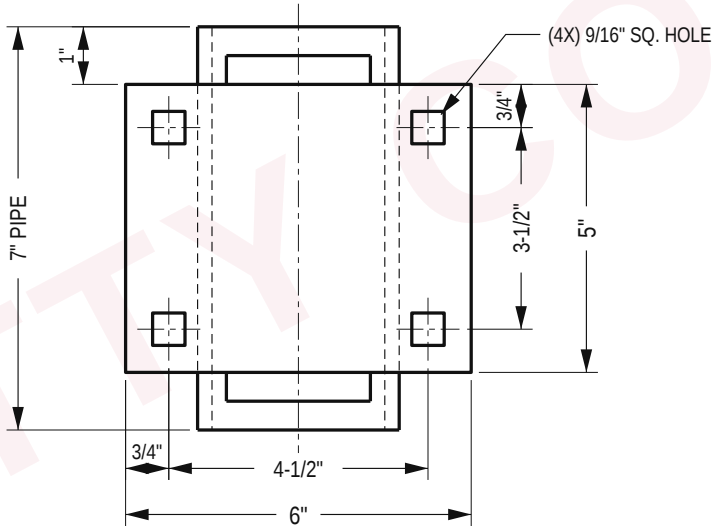

FRONT VIEW

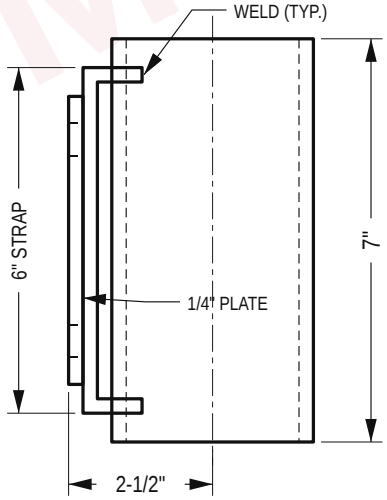

RIGHT SIDE VIEW



SPECIFICATIONS	
MATERIAL	ASTM A36 STEEL, 1/4" THICK
FINISH	HOT-DIP GALVANIZED, ASTM A153
YIELD STRENGTH	36,000 PSI MIN.
TENSILE STRENGTH	58,000 - 80,000 PSI
ELONGATION	20% MIN. IN 8"
PIPE SLEEVE	3" I.D. X 3-1/2" O.D. X 7" LONG
MOUNTING PLATE	6" X 5" X 1/4" THICK
STRAP	2-1/2" X 1/4" U-STRAP, 6" LONG
HOLES	(4) 9/16" SQUARE
FASTENERS	INSTALL USING 1/2" CARRIAGE BOLTS
APPLICATION	DOCK HARDWARE - BOLTS TO OUTSIDE OF DOCK

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. PART MUST BE FREE FROM RUST, DENTS & ANY OTHER SURFACE DEFECTS.
3. REMOVE ALL BURRS & SHARP EDGES.
4. ALL WELDS CONTINUOUS; HOT-DIP GALVANIZED AFTER FABRICATION PER ASTM A153.
5. SQUARE HOLES ACCEPT 1/2" CARRIAGE BOLT NECKS.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
FRACTIONAL: ± 1/16"
ANGULAR: ± 1°
BREAK ALL SHARP EDGES

THIRD ANGLE

THE NUTTY INC COMPANY
FASTENER SPECIALISTS SINCE 1977
19 Seemans Lane, Milford, CT 06460
203.877.1709 • sales@nutty.com • nutty.com

TITLE

3" PIPE HOLDER

ASTM A36 STEEL • HOT-DIP GALVANIZED ASTM A153

PART NO.

DHPH

SIZE	SCALE	UNITS	WEIGHT	DRAWN	DATE	SHEET
A	NTS	INCH	136 OZ	NUTTY	10/28/2026	1 OF 1

NUTTY COMPANY