

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/30/2026	NUTTY

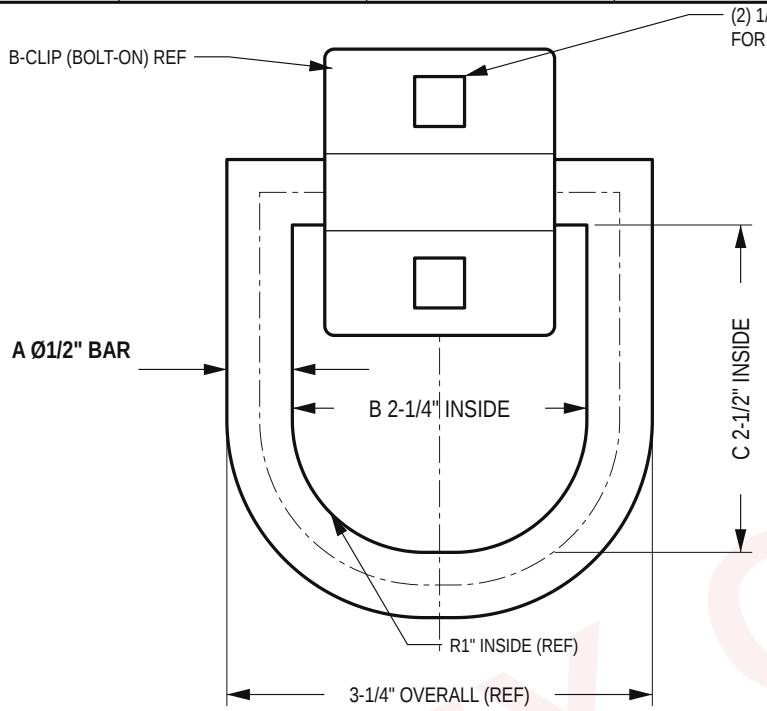


FRONT VIEW

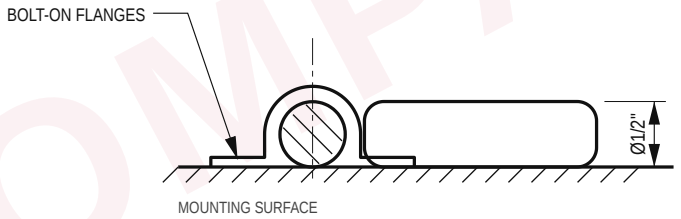

RING FOLDS FLAT WHEN NOT IN USE (NTS)

SIDE VIEW – FOLDED FLAT

RATINGS
WLL 4,000 LBS
MIN. BREAK 12,000 LBS
NOT FOR LIFTING



SPECIFICATIONS	
MATERIAL	FORGED STEEL RING & CLIP
FINISH	PLAIN (UNPLATED), WELDABLE
BAR DIA. (A)	1/2"
INSIDE W X L	2-1/4" X 2-1/2"
CLIP	B-CLIP, BOLT-ON, (2) 1/2" SQ. HOLES
WORKING LOAD LIMIT	4,000 LBS
MIN. BREAK STRENGTH	12,000 LBS
DESIGN FACTOR	APPROX. 3:1
USE	TIE-DOWN ONLY, NOT FOR LIFTING

NOTES:

1. ALL DIMENSIONS ARE IN INCHES; NOMINAL.
2. D-RINGS ARE FOR SECURING LOADS ONLY. NEVER USE FOR LIFTING.
3. MOUNTING SURFACE MUST SUPPORT AT LEAST 15% MORE THAN THE MAXIMUM LOAD TO BE PULLED.
4. BOLT THROUGH BOTH SQUARE HOLES WITH 1/2" CARRIAGE BOLTS; USE A BACKING PLATE ON WOOD.
5. NEVER EXCEED THE WORKING LOAD LIMIT. FOLLOW DOT CARGO SECUREMENT REGULATIONS.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
FRACTIONAL: ± 1/16"
FORGING TOLERANCES APPLY
CLIP SHOWN FOR REFERENCE

THIRD ANGLE

THE NUTTY INC COMPANY
FASTENER SPECIALISTS SINCE 1977
19 Seemans Lane, Milford, CT 06460
203.877.1709 • sales@nutty.com • nutty.com

TITLE

1/2" D-RING W/ BOLT CLIP

FORGED STEEL • WLL 4,000 LBS • LOAD SECUREMENT

PART NO.

DR12B

SIZE	SCALE	UNITS	WEIGHT	DRAWN	DATE	SHEET
A	NTS	INCH	1 LB	NUTTY	10/30/2026	1 OF 1

NUTTY COMPANY