




PRODUCT DATA SHEET

Galvanized Ogee Washers – Cast Iron

1.0 Dimensions Nominal (inches)

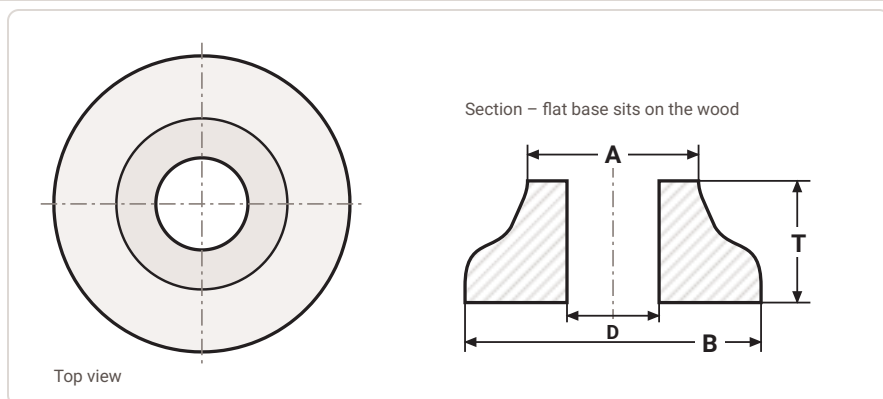

Bolt Size	Hole Dia. (D)	Top O.D. (A)	Bottom O.D. (B)	Thickness (T)	Approx. Wt. per 100 (lb)	Nutty Stock #
1/2"	5/8"	1-3/8"	2"	1/2"	27	GOGW12
5/8"	3/4"	1-5/8"	2-3/4"	5/8"	56	GOGW58
3/4"	7/8"	1-7/8"	3"	3/4"	72	GOGW34
7/8"	1"	2"	3-1/2"	7/8"	124	GOGW78
1"	1-1/8"	2-1/2"	4"	1"	160	GOGW1

Dimensions are nominal industry values for cast ogee washers; castings vary slightly. Weights are approximate.

2.0 Material & Finish

Material	Cast gray iron, ASTM A48 Class 30
Finish	Hot-dip galvanized
Galv. Spec	ASTM A153 & ASTM F2329
Profile	Ogee (S-curve), wide flat base

3.0 Application

- Thick, cast washers with a wide flat base give the bolt head or nut a large bearing area on heavy timber, so it won't sink or pull into the wood.
- The traditional washer for docks, piers, bulkheads, timber bridges, retaining walls and log construction.
- Install with the wide flat base against the wood and the narrow top facing the nut or bolt head. Use with galvanized timber, carriage or hex bolts and threaded rod.

Disclaimer: The above is a compilation of data from various industry standards. The Nutty Company, Inc. has made every effort to present the data accurately. However, The Nutty Company, Inc. cannot be held liable for any claim traceable to any errors, typographical or otherwise, contained herein.



Building a dock? We stock the whole job.

Galvanized dock washers, timber bolts, carriage bolts, threaded rod & dock hardware – call 203.877.1709 or email sales@nutty.com