


TORX® DRIVE FLAT HEADS (Floorboard)							
Nominal Size or Basic Screw Diameter		G		T	B	F	Drive Size
		Head Dimensions			Recess Dimensions		
		Max Sharp	Abs. Min	Ref	Ref	Gauge Penetration Min.	
1/4	.2500	.520	.452	.160	.221	.060	T30
5/16	.3125	.648	.568	.199	.266	.090	T40

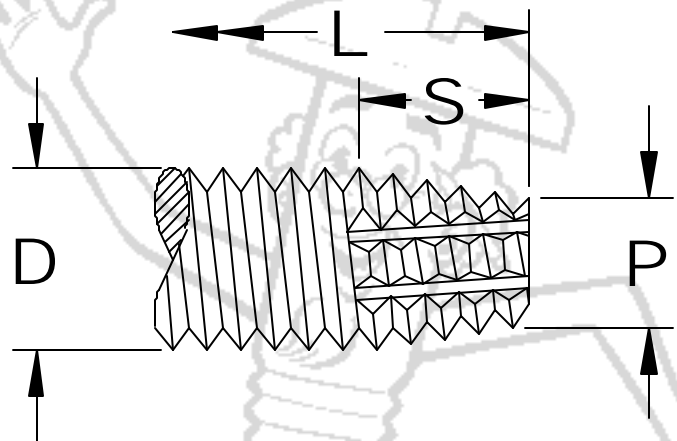

THREADS AND POINTS FOR Type-F THREAD CUTTING FLOORING SCREWS

Nominal Size or Basic Screw Diameter		Threads Per Inch	D		P		S				L		Minimum Torsional Strength, lb.-in. (STEEL SCREWS ONLY)		
			Major Diameter		Point Diameter		Point Taper Length				Determinant Length for Point Taper			Minimum Practical Screw Lengths	
							Short Screws		Long Screws						
			Max	Min	Max	Min	Max	Min	Max	Min	90° Heads	Csk Heads		90° Heads	Csk Heads
1/4	.2500	20	.2500	.2408	.200	.184	.175	.125	.225	.175	13/32	17/32	3/8	1/2	140
5/16	.3125	18	.3125	.3026	.257	.239	.194	.139	.250	.194	15/32	19/32	7/16	9/16	306